
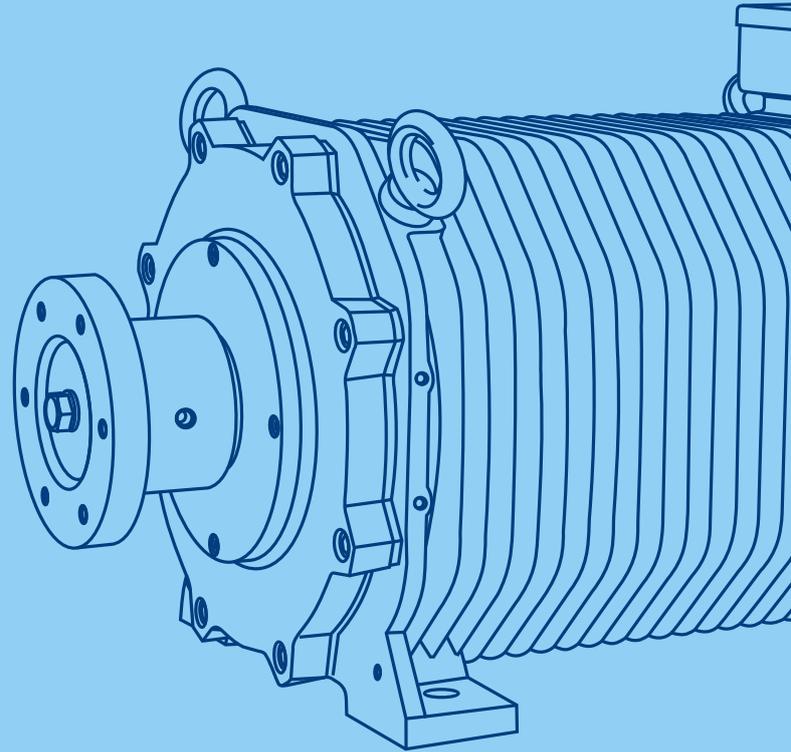


AUTOMATION SOLUTIONS SIMPLIFIED

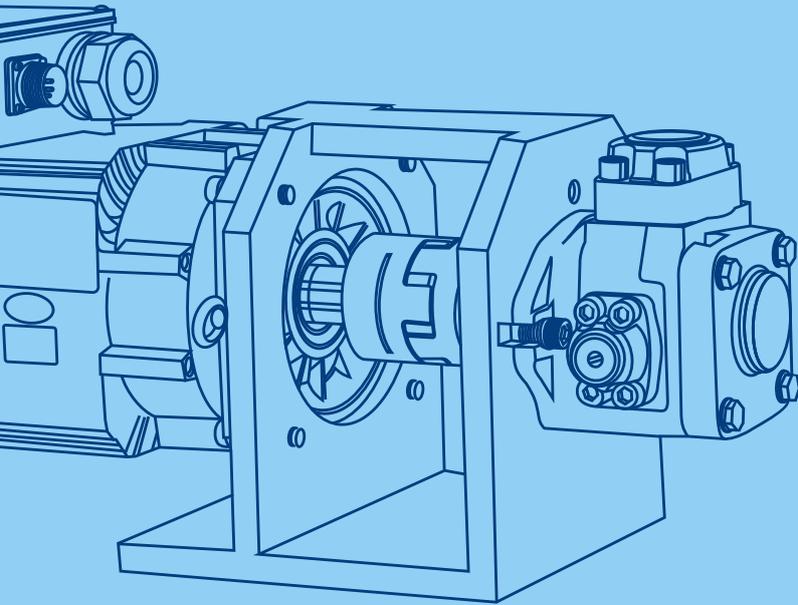

Energy Saving Solutions for
Plastic Machinery, Hydraulic Press and
Pressure Die Casting Machines

ENERGY EFFICIENCY, PRECISION AND PRODUCTIVITY FOR:

- PLASTIC INJECTION MOULDING MACHINES
- BLOW MOULDING MACHINES
- EXTRUSION MACHINES
- HYDRAULIC PRESS
- PRESSURE DIE CASTING MACHINES

Servo Drive Technology for the Hydraulic Gear Pump



Flow: 30LPM to 450LPM | Pressure: 120 Bar to 320 Bar in Single Pump - Motor Configuration

Complete Customised Package Comprising:

KEB F6 Servo Drive: Intelligent and Compact

SynchroTorq[®] PM Servo Motor: Excellent Dynamic Response and Low Inertia

Internal Gear Pump with Cradle: Low Noise and High Efficiency

Accessories: EMC Filter, Choke, DBR, Cables, PLC, HMI

300,000+ plastic machines are driven by KEB drives worldwide

A DECADE OF PARTNERSHIP



Our partnership with KEB Automation KG of Germany dates back to 2007. We have a license agreement with the company to manufacture and sell KEB Drives in India. KEB Drives of ratings 15kW to 450kW are assembled, tested and supplied across the country from our plant at Airoli, Navi Mumbai.

We leverage our experience of over 75 years in rotating machines, to offer a wide range of AC Variable Speed Drives and Servo Drive systems. KEB Drives cater to a variety of challenging applications that demand high performance with superior accuracy and dynamic

response. KEB also designs and manufactures high speed multi-axis C6 motion controllers.

Our modern ISO 9001:2015 certified plant in Airoli conducts assembly and load testing of KEB Servo Drives from 15kW to 450kW. The parts for the Drives are sourced directly from KEB or their approved vendors. Post inward quality control, the Drives are assembled by qualified technicians with the help of appropriate tools in a dust-free environment. All the instruments in the assembly plant are periodically calibrated.

Every Drive is tested for complete functionality and on full load at elevated temperature of 50°C for one hour. The electronic boards of the Drive have Epoxy conformal coating for protection against dust and moisture deposition. This ensures that the customer receives a Drive that is reliable and has undergone stringent quality control checks.



ENERGY SAVINGS WITH KEB'S SERVO DRIVE SOLUTIONS

The Servo pump system combines a Servo Motor's fast step-less speed regulation with the hydraulic pump's self pressure adjustment. This can yield high energy savings (30% to 60% depending upon cycle time) compared to with traditional constant/variable displacement pump systems.



Position Repetition Accuracy

Fast response guarantees mould-close/opening accuracy as well as injection accuracy.




Pressure Control

Fast responsive PID module of the Servo Drive achieves stable system pressure and very fine accuracy due to close loop control. Long pressure holding times of >30 seconds can be achieved using KEB Drives.

The Servo Drive-Motor operates the Servo Pump @ 3000rpm and achieves additional energy savings of 5% compared to Servos that operate at lower speeds. These features result in overall improvement of machine performance by eliminating rejections, improving product quality and improving productivity.

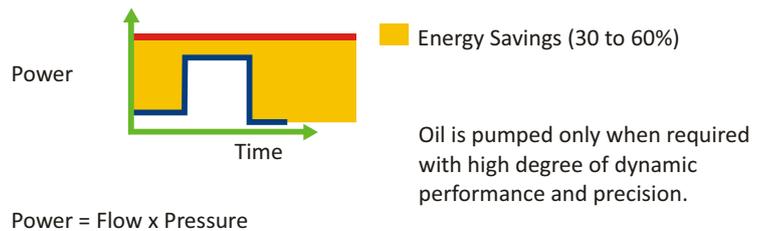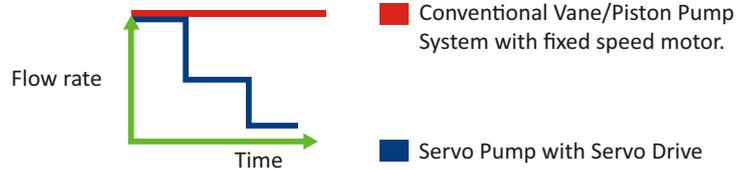

Power = Flow x Pressure

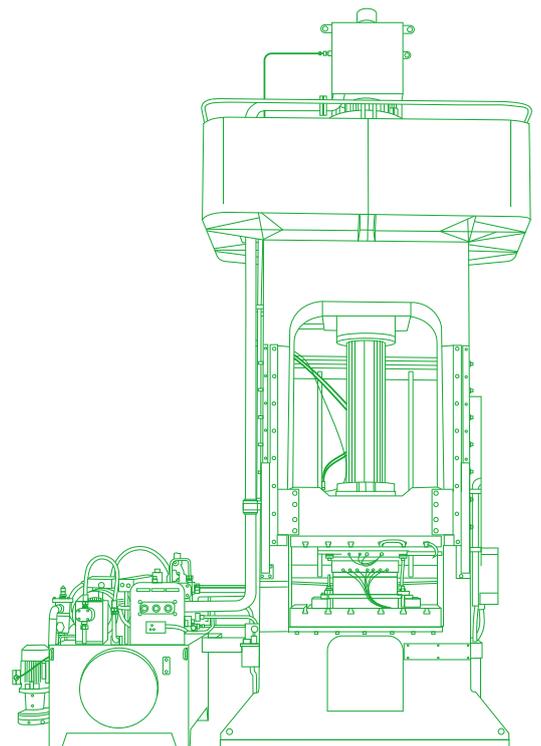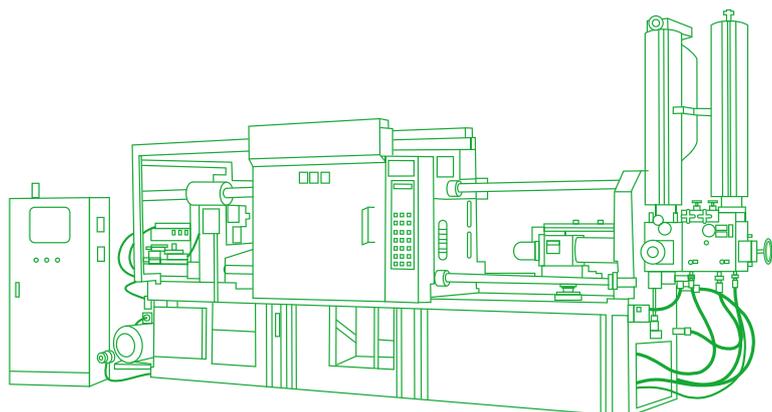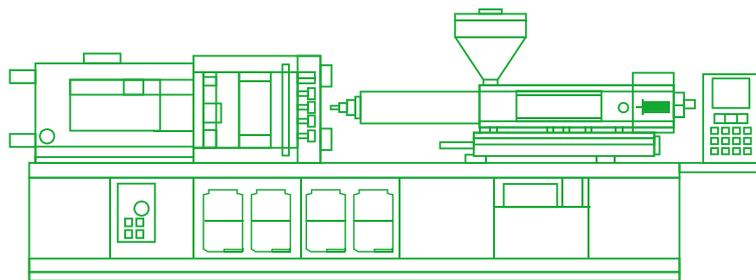

KEB'S NEW GENERATION OF F6 SERVO DRIVES

Product Highlights:

- Power Range: 2.2kW to 400kW (upto 450kW in water cooled version)
- Wide Input Operating Voltage Range 400V class: 280V to 550V A.C (395V to 778V D.C) 230V class: 185V to 265V A.C (260V to 375V D.C).
- High Efficiency (> 98%)
- Varnished boards for protection against harsh environments
- 2 MultiEncoder Channels Onboard with Encoder Detection and Emulation
- Integrated Functional Safety Module (STO, SBC)
- RealTime Ethernet on Board
- Sensorless control of Synchronous and Asynchronous Motors
- Flexible cooling concept (Water, Air-Push Through and Built in Heatsink) with compact design
- CiA402 profiles for standardised programming
- 599Hz default frequency and upto 2000Hz by activation
- High speed, high torque operation and position control supported by adjustable switching frequency upto 16Khz
- One firmware for all the Motors-Driving Synchronous, Induction, IPM, Switch Reluctance Synchronous motors with/without Encoders.
- Strong overload capability of drives: 150% for 60 secs and 216% for 1 sec.
- Communicate Drive with Mobile App and Bluetooth adapter (optional) for parameterisation and diagnosis
- Pluggable Operator LCD Display Module with USB/Ethernet Interface
- RealTime Fault Log
- Faster Scan Times of Analog & Digital I/O Channels
Input 500µ secs
Output 1000µ secs
- Faster control cycle times: current: 62.5µ secs
Speed: 250µ secs
Position: 250µ secs
- Recipe management enables storage and selection of Drive parameter list directly on the Drive
- 16 channel oscilloscope for extensive analysis
- Multiple Operating Modes: Velocity, Homing, Profile Position, Cyclic Synchronous Velocity/Profile Position
- Power Off function
- Integrated Brake Control and Braking Chopper

Drive Networking

KEB drives offer an extensive range of networking options.



EtherCAT®

Sov EtherCAT®



CANopen®

PROFI
NETO®

ETHERNET
POWERLINK

EtherNet/IP®

Applications



Plastic Injection Moulding Machine



Plastic All Electric Injection Moulding Machine



Plastic Extrusion Machine




Hydraulic Press



Pressure Die Casting Machine

SERVO PUMP WIZARD IN F6 DRIVE FOR SERVO PUMP APPLICATIONS

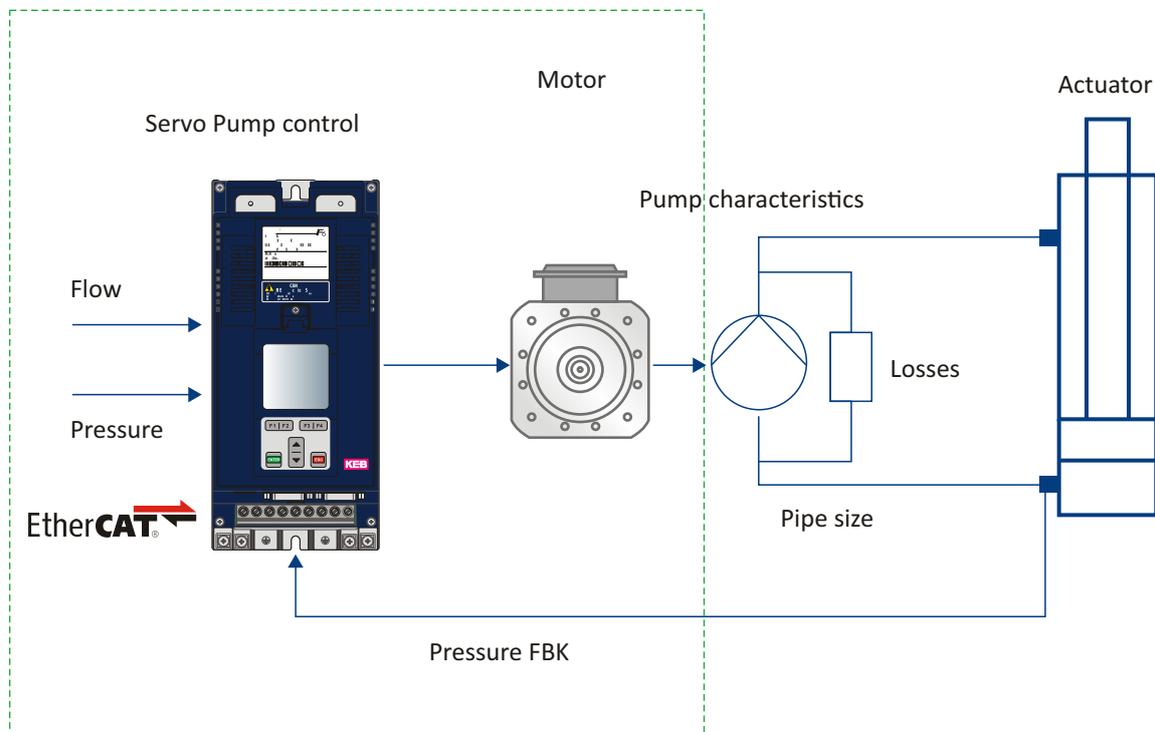

Features & Benefits:

- Servo Pump Wizard enables faster and easy commissioning of the complete Drive system
- Drive parameters in Hydraulic Terminology: Pressure (P) & Flow (Q) enables setting of precise set point and pump parameters
- Pressure sensor failure detection protects pumps against high pressure
- Measurement and Display of Power (kW)/Energy (kWh) for servo motor, pump and braking resistor
- Accurate pressure and flow control improves product quality and eliminates material wastage
- Drive Auto Tuning Feature with pump in the circuit enables precise setting of Drive PID controllers parameters
- Quick and easy MultiPump configuration and operation
- Fast pressure response reduces overall cycle time and improves productivity
- Protection of pump against cavitation; reverse rotation
- Mechanical Blockage Detection by monitoring pressure derivatives provides additional safety to moulds and screw of the machine
- Hydraulic band stop filter for eliminating pressure resonance phenomenon that causes vibrations in the machine
- Supports all type of pressure transducer (0-10v; 4-20mA; 0-20mA, 0-10mV etc.) that enables easier calibration of feedback device
- Multiple PID controllers to optimise specific function of the machines (e.g flow control during injection; pressure control during clamping etc.)
- Additional protection against malfunctioning of safety relief valve or pressure transducer by current limit feature

SCL TECHNOLOGY FOR PLASTIC IMM

SCL Servo Package Ratings: 60LPM to 150LPM @150 bar Pressure

Bharat Bijlee's Servo solutions with KEB Drives for the plastics industry have a proven record of outstanding torque and speed control. They use resolver/encoder feedback for superior positioning accuracy in a highly dynamic operation. However, in some high torque applications like Plastic Extruders and lower tonnage moulding machines, the costly and vulnerable feedback devices

can be eliminated without compromising performance.

When economy is as important as reliability, KEB's SCL technology becomes an ideal choice. The new SCL servo solution using our SynchroTorq® Servo Motors fulfils these twin objectives - along with precise torque control and dynamic response.



SynchroTorq® | Servo Series
PERMANENT MAGNET SERVO MOTOR


Sensorless Closed Loop (SCL) Motor Control

KEB's unique Sensorless Closed Loop (SCL) motor control technology uses an accurate motor model with a calculated rotor position module. This is achieved without feedback of the motor shaft

and enables outstanding decentralized single-axis positioning without an encoder.

What is SCL?

SCL is designed for high performance speed and torque control in processes where the system advantages of Permanent Magnet (PM) motors can be leveraged. It allows field orientated control of (PM) motors without encoder feedback. The principle of SCL is based on a very precise mathematical model of the motor that builds a virtual rotor position in the control software. During SCL operation, the KEB drive continuously measures the different components of the output current and feeds back this information to the internal motor model. Here the actual flux and torque is compared with the mathematical model. The current can then be regulated to match the required speed and torque. All feedback is handled internally by the drive.

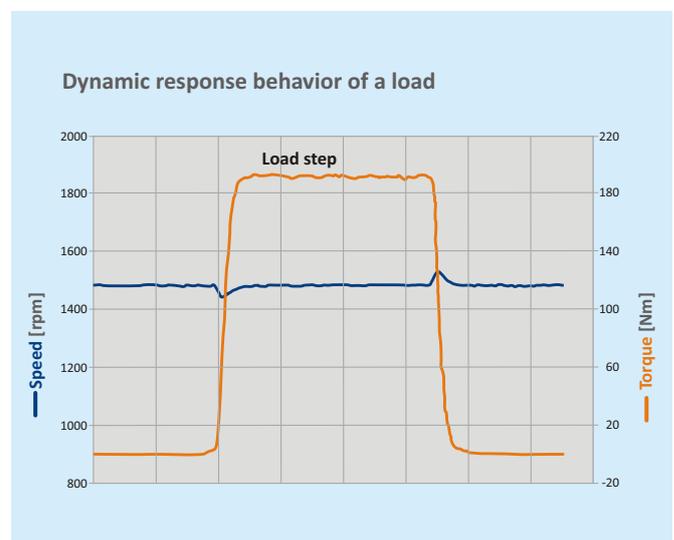

No Feedback Devices

The major benefit of this control method is that no encoder, interface card, or associated cabling is required. This improves reliability and reduces cost by reducing the number of components and the potential problems of encoder parts, electronics, heat transfer from the motor, and noise from long cable lengths. It becomes especially

important in harsh ambient environments, and under shock and vibration.

SCL Technology uses standard KEB Drive hardware, and is software selectable. The drives feature a number of different homing options that can be configured for the application.

Key Features of SCL Servo Solution for Plastic IMM



Closed Loop (SCL): point-to-point positioning without encoder or resolver feedback



Excellent performance during sudden load variation: comparable with closed loop drives



Reduced costs: elimination of encoder, interface card and its cable



Robust and reliable system solution: potential interference sources from the encoder system are eliminated



Torque & Speed accuracy: < 0.3% of rated values



Servo motors are specially designed for maximum speed of 2500rpm and high Kt factor



Improved pump reliability due to operating speeds < 2500rpm



Ambient temperature for the system: 45°C



Accessories: Pump; Cradle, Coupling, Shielded Power Cables, AC Choke, Brake Resistor




Compact servo drive reduces cabinet size



Servo drives have 3c3 class conformal coated electronic boards for protection in harsh environments

SCREW ROTATION TECHNOLOGY FOR PLASTICS MACHINERY

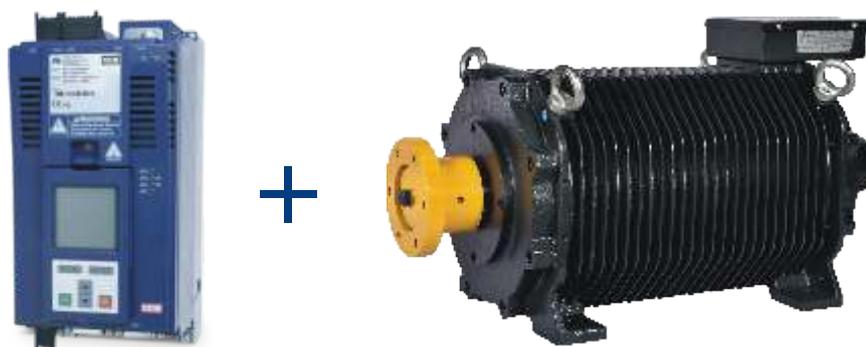

SynchroTorq®

Direct Drive for Screw Applications
for Plastic Machines

Direct Drive Torque Motors can be offered as a customised energy savings solution to eliminate the gear box, for driving the screw of Plastic Extrusion Machines (Blown Film/Sheet/Pipe). It offers significant energy saving and eliminates problems like noise, oil spillage, lubrication, frequent maintenance and noise. It is compact and occupies less space than a motor+gear box combination.

Direct Drive Motors can also be offered for driving the screw of Plastic Injection Moulding Machines eliminating the hydraulic motor. Hydraulic motors often have inconsistent speeds with torque pulsations and are prone to wear and tear. This reduces energy costs

and also improves productivity by reducing overall cycle time.

These motors can be driven by KEB's SCL technology that does not need encoder feedback.

Direct Drive Motor Technical Specifications:

- Torque Range: 300Nm to 5000Nm
- Speed Range: 100rpm to 500 rpm
- Power Range: upto 150kW

*higher ratings also offered.

SYNCHRONOUS AC SERVO MOTORS


Bharat Bijlee has indigenously developed SynchroTorq® a high performance permanent magnet AC synchronous Servo Motor, for driving the gear pump in various applications, such as:

- Plastics: Injection Moulding and Blow Moulding machines
- Hydraulic Press Machines
- Pressure Die-Casting Machines
- Pipe Bending Machines

The SynchroTorq® series of Servo Motors combined with KEB Servo Drives are an energy-saving automation solution package for plastic machinery. It comes with accessories such as cables, pumps, cradle-coupling for driving the gear pump. The combined package offers dynamic control for demanding positioning and cyclic applications.

SynchroTorq® | Servo Series

PERMANENT MAGNET SERVO MOTOR

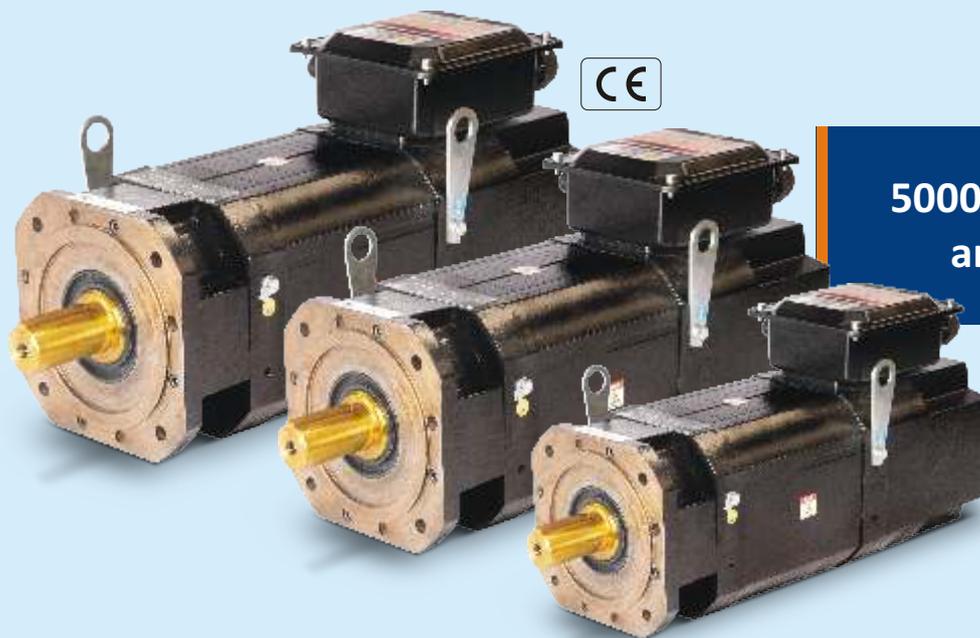

**5000+ Installations
and growing**

Torque Ratings: 15Nm to 280Nm | Power Ratings: 2.5kW to 58kW | Maximum Speed: 3200rpm

Key Features

- | | | | |
|---|--|---|--|
|  Ambient temperature: 45°C |  Superior grade permanent magnets with excellent thermal characteristics. |  Shaft, mounting, and connector options |  Thermal sensors: KTY and PTC |
|  Bearings with high temperature grease |  Integrated with KEB Servo Drives: functional safety and auto-tuning features |  Sturdy laminated yoke design. |  Certifications: CE |
|  Feedback: Encoder or Resolver |  Insulation Class: H |  Protection type: IP54 (optional IP55 or IP65) |  Cooling: 1Ø 230V fan with high CFM |
|  Rotatable terminal box | | |  Customisation for special load characteristics |

SERVO DRIVE SOLUTIONS FOR PLASTIC ALL-ELECTRIC IMM

All-Electric Plastic Injection Moulding machines are well established across applications and markets, and offer significant advantages in terms of Energy savings; Shorter machine cycles, Accuracy and Repeatability. As technology advances, these machines can affordably cater to increasingly higher clamping tonnages and meets requirements of oil free environment and lower maintenance.

Bharat Bijlee also offers Energy savings servo solutions consisting of customized PM servo motor with various encoder devices and KEB (Germany) High Performance Servo Drives with accessories for all-electric injection moulding machines for all the 4 Axis i.e. Injection, Refilling, Clamping & Ejection. Superior technological features and application expertise combine to provide significant end-use benefits in all-electric models.

- Accuracy, precision and repeatability leading to consistency of production
- Higher Peak Torque with fast dynamic response
- High degree of cleanliness: no oil leaks and lower maintenance
- Energy savings of 30-70%. With Quieter Operation


- Rapid injection speeds (up to 800mm/sec) and faster clamp motion.

- Faster cycle times resulting in improved productivity

As the demand for injection moulded parts continue to grow across industrial and consumer sectors, there is also an opportunity to retrofit and refurbish an ageing installed base of all-electric injection moulding machines with newer technology. Obstacles can include ready availability of key system components, and integration and commissioning expertise.

Bharat Bijlee's retrofit solution is flexible and economical, and offers superior technical features. Servo drives and/or motors can be provided for each axis. A standard hydraulic machine PLC controller can be used to manage all four axes through a servo drive and a wide range of encoder options and communication protocols. The accuracy of the KEB drives enables precise torque and speed control - as well as operating torque and holding torque - using intelligent control of the drive even with the hydraulic machine controller.

Automation Scheme: KEB Servo Drive Solution for Retrofit of All-Electric Machines

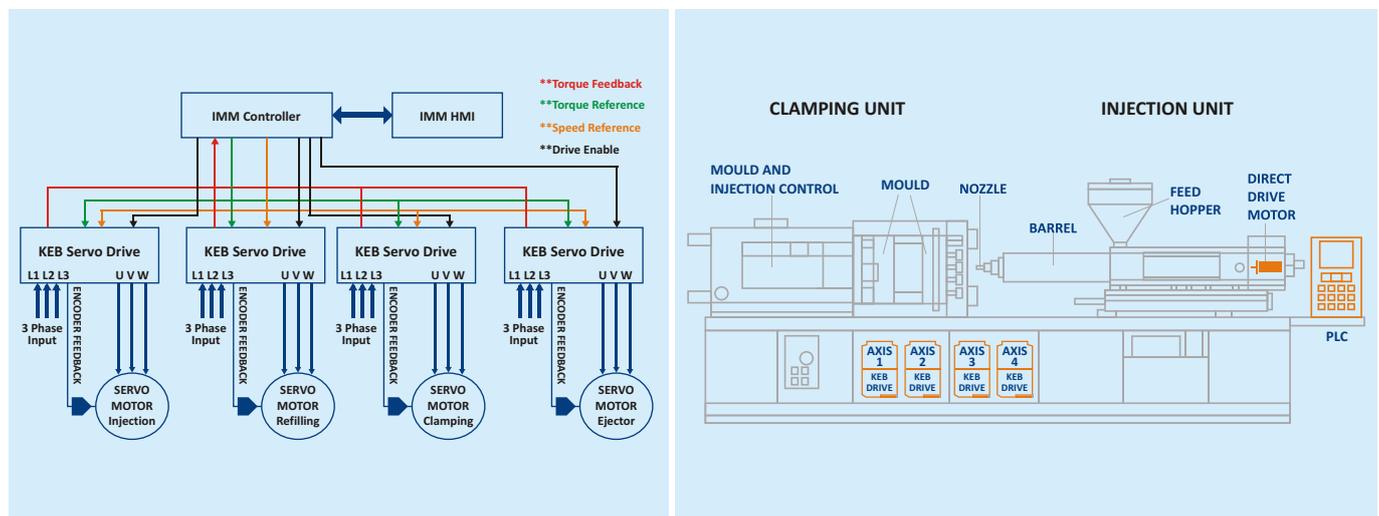


Key advantages of the Retrofit solution for All-Electric Injection Moulding Machines

-  Sensor-less torque and load measurements.
-  Position control can be achieved without encoder or resolver feedback using KEB's unique Sensor-less Closed Loop (SCL) motor control.
-  Position accuracy up to the least scale value of the linear sensor.
-  Better torque hold at zero speed.
-  Torque accuracy up to 0.1 Nm.
-  A standard hydraulic machine controller can be used.
-  Mould safety without external torque sensor.
-  Wide range of encoders and communication interfaces allows operation with any make of servo motor.

KEB Servo Drives support key field communication protocols:
 EtherNet/IP | EtherNet TCP/IP | EtherCAT | Powerlink | PROFINET | PROFIBUS | CANopen | DeviceNet | Modbus


ENABLING PRODUCTIVITY, PRECISION AND ENERGY EFFICIENCY

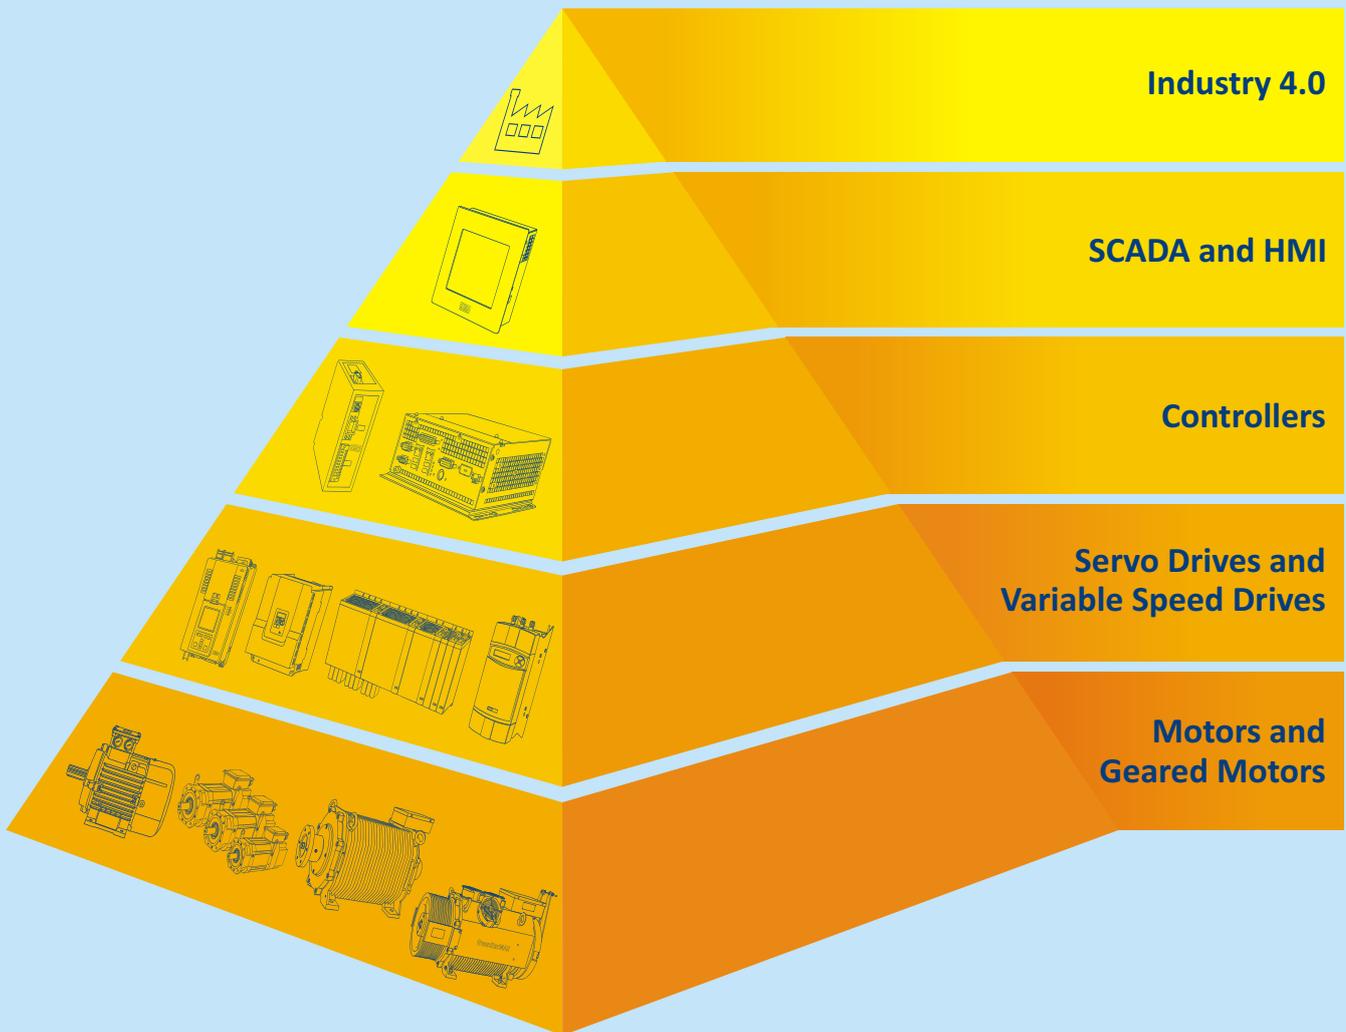

Bharat Bijlee's Industrial Systems product portfolio caters to a spectrum of applications and spans the machine automation pyramid.

ALL INDIA SERVICE NETWORK

- Regional Offices
- 🔥 Works
- ✕ Service Centre: Drives
- ✕ Service Centre: Servo Motors

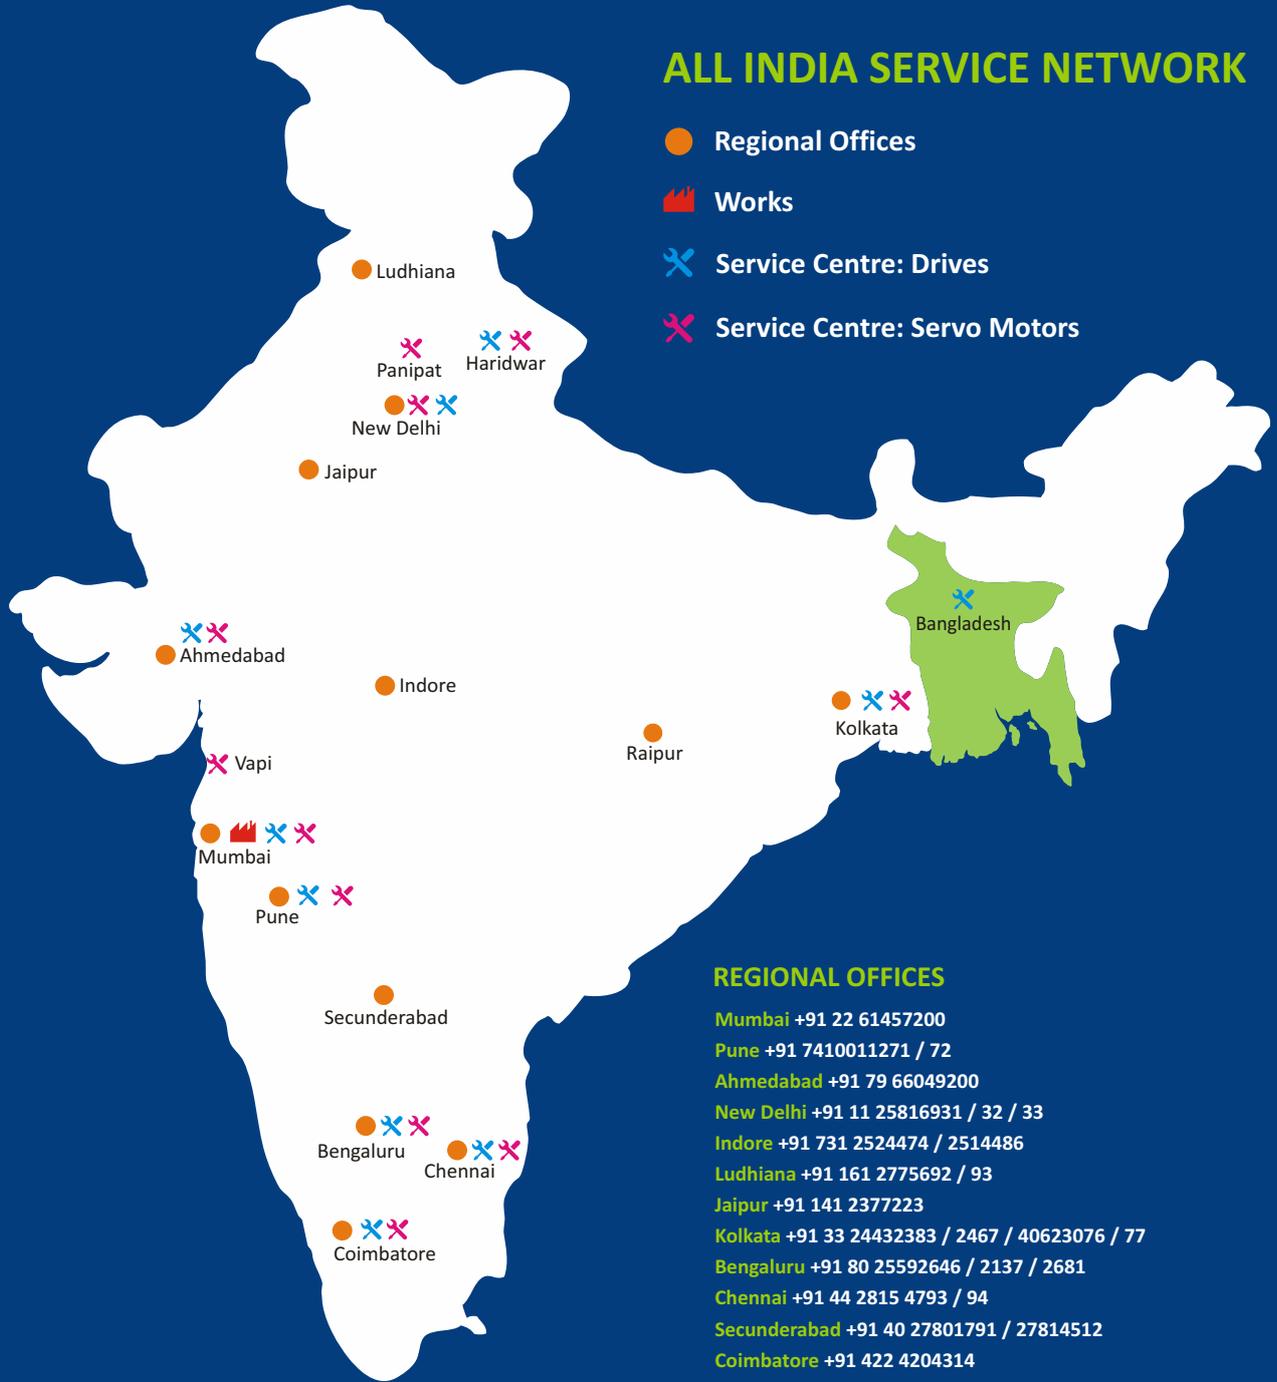

REGIONAL OFFICES

- Mumbai** +91 22 61457200
- Pune** +91 7410011271 / 72
- Ahmedabad** +91 79 66049200
- New Delhi** +91 11 25816931 / 32 / 33
- Indore** +91 731 2524474 / 2514486
- Ludhiana** +91 161 2775692 / 93
- Jaipur** +91 141 2377223
- Kolkata** +91 33 24432383 / 2467 / 40623076 / 77
- Bengaluru** +91 80 25592646 / 2137 / 2681
- Chennai** +91 44 2815 4793 / 94
- Secunderabad** +91 40 27801791 / 27814512
- Coimbatore** +91 422 4204314

BB ServiceLINE®
 Customer Service Helpdesk for Industrial Systems
 +91 22 - 2763 7290
 +91 22 - 2763 7490
 serviceline@bharatbijlee.com



Bharat Bijlee
Drives & Automation
Mobile App
 for Troubleshooting
 and Maintenance of
 Drives and Servo Motors.

Scan to download the app for free

For Android Users



For iOS Users



REGISTERED OFFICE
 Electric Mansion, 6th Floor,
 Appasaheb Marathe Marg,
 Prabhadevi, Mumbai 400 025
 T: +91 22 4614 1414
 E: info@bharatbijlee.com
 CIN: L31300MH1946PLC005017

WORKS
 No. 2, MIDC Thane-Belapur Road, Airoli,
 Navi Mumbai 400 708
 T: +91 22 2763 7200 / +91 22 2760 0401
 E: drivesales@bharatbijlee.com
 www.bharatbijlee.com

Follow us on ▶



www.facebook.com/bharatbijleeltd



www.linkedin.com/company/bharat-bijlee-ltd

All product designations may be trademarks or product names of Bharat Bijlee Ltd, or of its partner or supplier companies, and whose use by third parties for their own purposes could violate the rights of the owners.

Product improvement is a continuous process and technical information herein is subject to change. Please contact our nearest sales office for the latest information.